


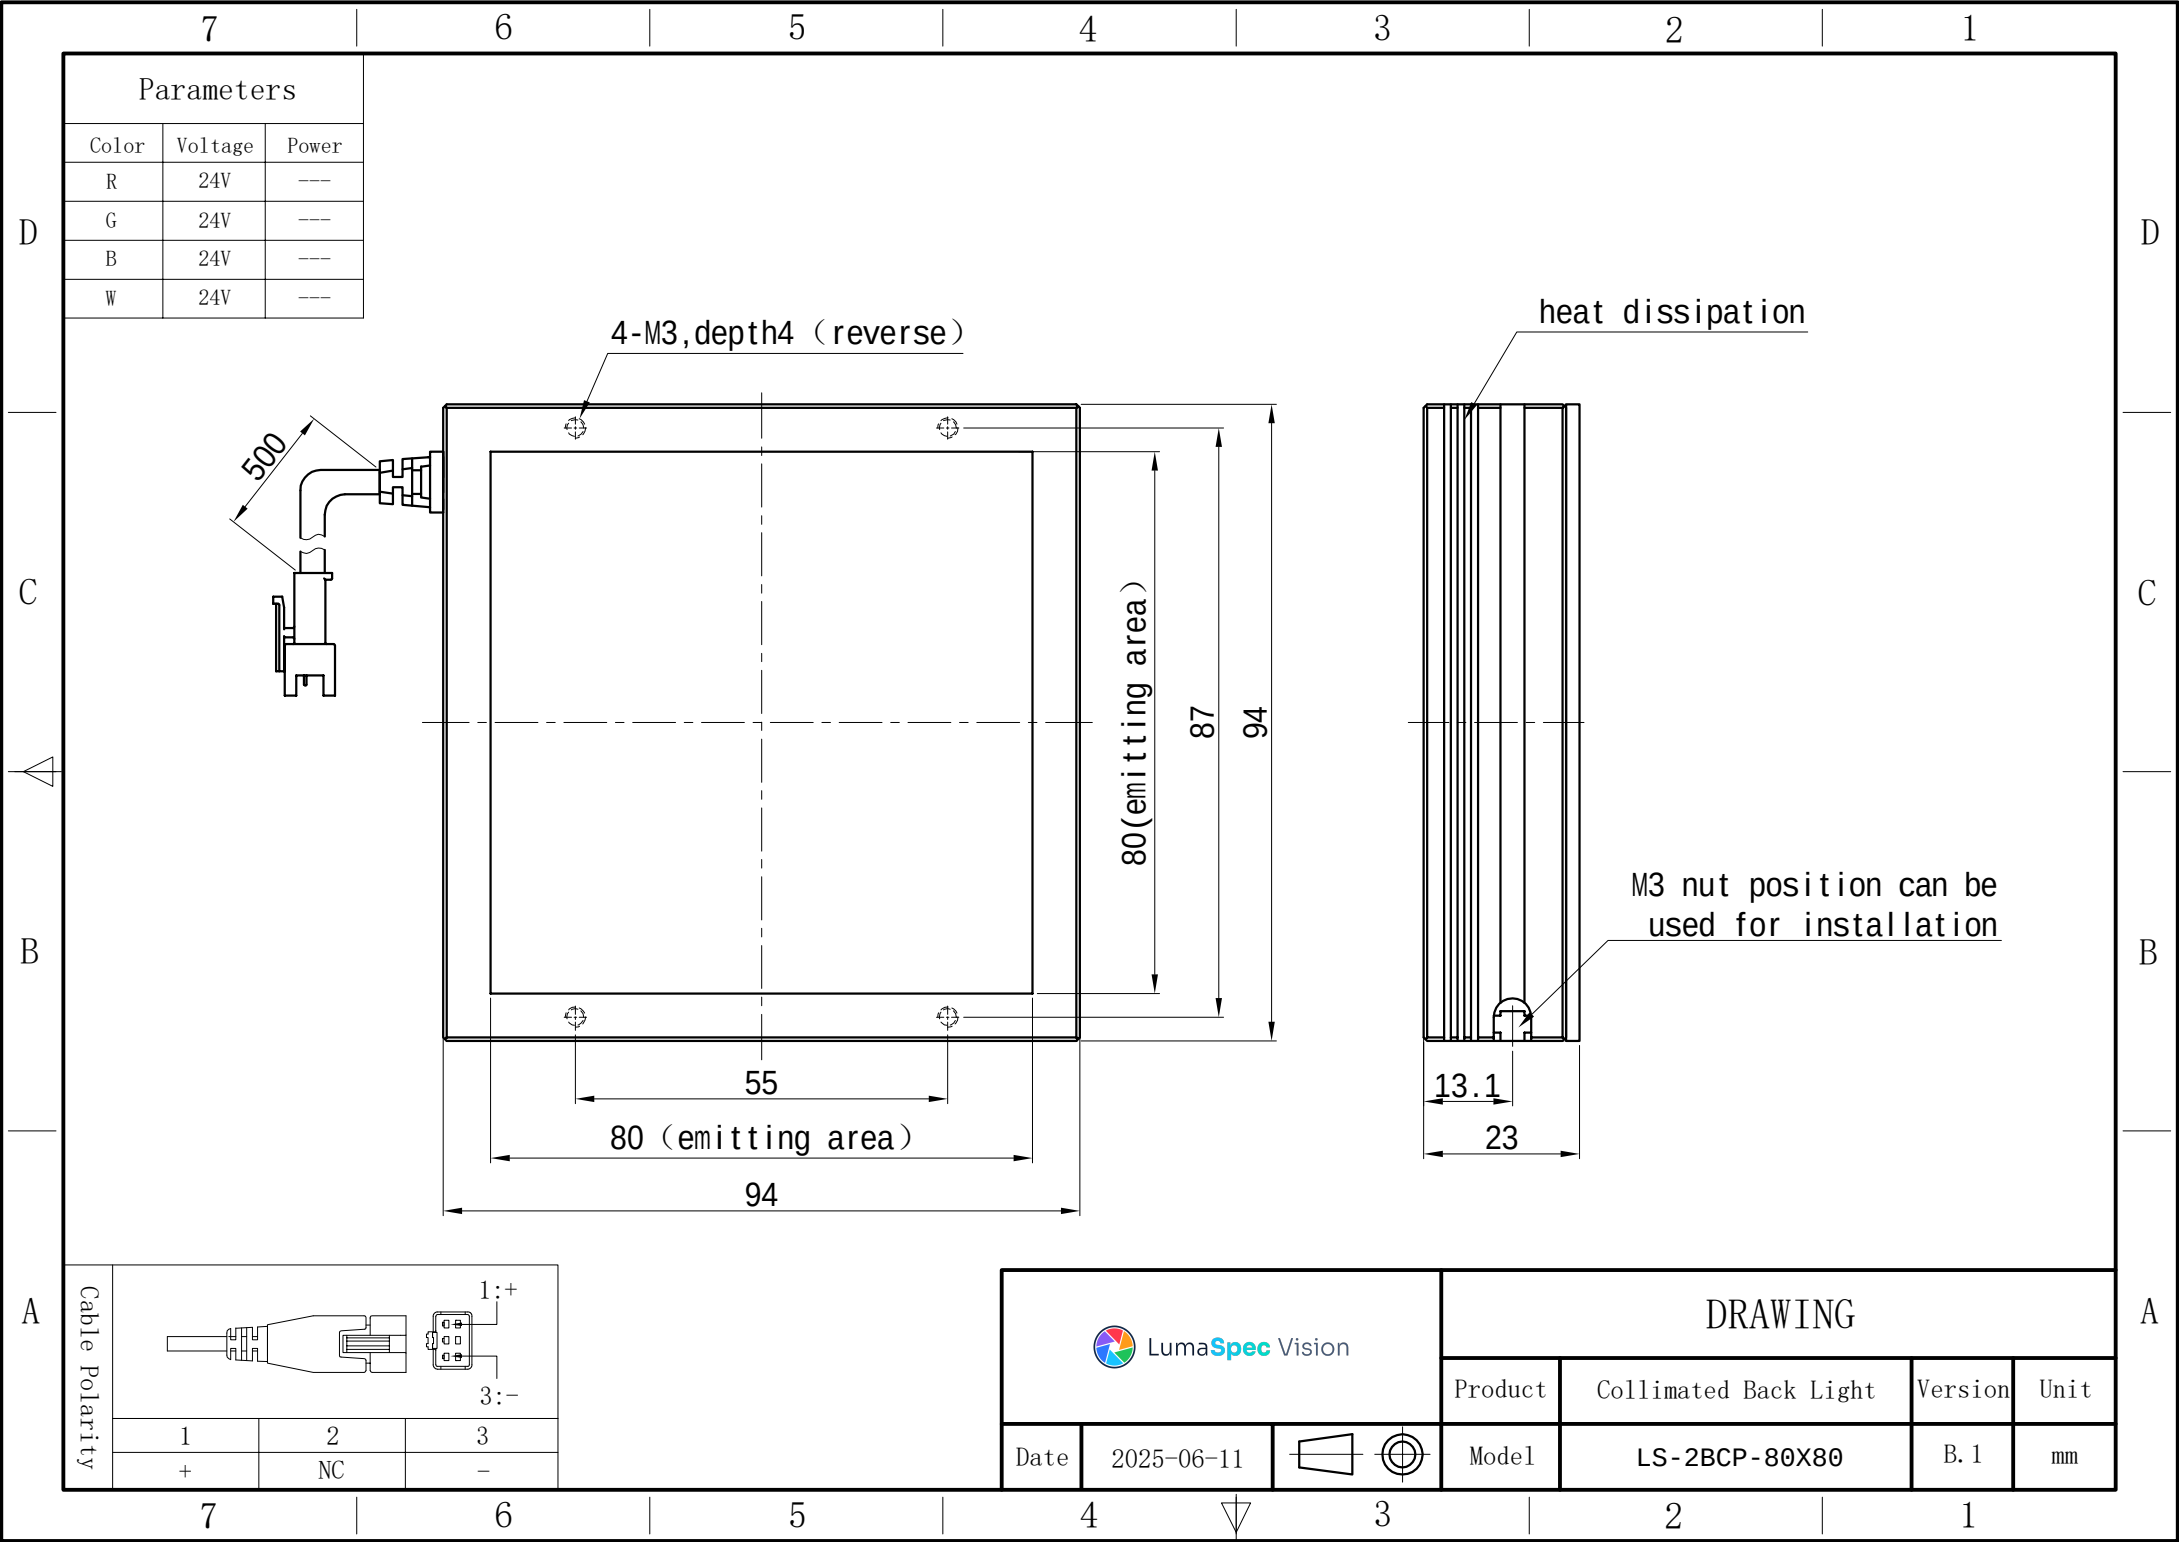

7

6

5

4

3

2

1

D

D

C

C

B

B

A

A

Parameters


Color	Voltage	Power
R	24V	---
G	24V	---
B	24V	---
W	24V	---

4-M3,depth4 (reverse)

heat dissipation

M3 nut position can be used for installation

Cable Polarity



1:+

3:-

1

2

3

+


NC

-

LumaSpec Vision

Date

2025-06-11



Product

Collimated Back Light

Version

Unit

Model

LS-2BCP-80X80

B.1

mm